

BEARING UNITS





FOUR BOLT FLANGE UNITS

UCF200 Series

Normal Duty

Set Screw Locking

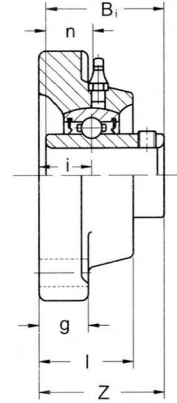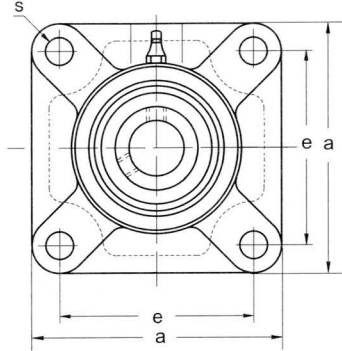

Unit No.	Shaft Dia.		Dimensions inch / mm									Bolt Size	Bearing No.	Housing No.	Weight Lbs kg
	In.	mm	a	e	i	g	l	s	z	Bi	n				
UCF 201-8	1/2												UC 201-8		
202-10	5/8		3-25/64	2-1/2	19/32	7/16	1	15/32	1.5/16	1.220	0.500	3/8	202-10	F204	1.54
204-12	3/4		86	63.5	15	11	25.4	12	33.3	31	12.7	M10	204-12		0.7
204		20											204		
UCF 205		25											UC 205		
205-14	7/8		3-3/4	2-3/4	5/8	1/2	1-1/16	15/32	1-13/32	1.339	0.563	3/8	205-14	F205	1.76
205-15	15/16		95	70	16	13	27	12	35.7	34	14.3	M10	205-15		0.8
205-16	1												205-16		
UCF 206		30											UC 206		
206-17	1-1/16		4-1/4	3-9/32	23/32	1/2	1-1/4	15/32	1-37/64	1.500	0.626	3/8	206-17	F206	2.20
206-18	1-1/8		108	83	18	13	31	12	40.2	38.1	15.9	M10	206-18		1.0
206-19	1-3/16												206-19		
206-20	1-1/4												206-20		
UCF 207		35											UC 207		
207-20	1-1/4		4-19/32	3-5/8	3/4	19/32	1-11/32	9/16	1-3/4	1.689	0.689	7/16	207-20	F207	3.08
207-21	1-5/16		117	92	19	15	34	14	44.4	42.9	17.5	M12	207-21		1.4
207-22	1-3/8												207-22		
207-23	1-7/16												207-23		
UCF 208		40											UC 208		
208-24	1-1/2		5-1/8	4-1/64	13/16	19/32	1-13/32	5/8	2-1/64	1.937	0.748	1/2	208-24	F208	3.96
208-25	1-9/16		130	102	21	15	36	16	51.2	49.2	19	M14	208-25		1.8
UCF 209		45											UC 209		
209-26	1-5/8		5-25/64	4-1/8	7/8	5/8	1-1/2	5/8	2-1/16	1.937	0.748	1/2	209-26	F209	4.84
209-27	1-11/16		137	105	22	16	38	16	52.2	49.2	19	M14	209-27		2.2
209-28	1-3/4												209-28		
UCF 210		50											UC 210		
210-30	1-7/8		5-5/8	4-3/8	7/8	5/8	1-9/16	5/8	2-5/32	2.031	0.748	1/2	210-30	F210	5.28
210-31	1-15/16		143	111	22	16	40	16	54.6	51.6	19	M14	210-31		2.4
210-32	2S												210-32		
UCF 211		55											UC 211		
211-32	2		6-3/8	5-1/8	31/32	23/32	1-11/16	3/4	2-9/32	2.187	0.874	5/8	211-32	F211	7.92
211-34	2-1/8		162	130	25	18	43	19	58.4	55.6	22.2	M16	211-34		3.6
211-35	2-3/16												211-35		
UCF 212		60											UC 212		
212-36	2-1/4		6-7/8	5-5/8	1-3/16	23/32	1-7/8	3/4	2-45/64	2.563	1.000	5/8	212-36	F212	9.68
212-38	2-3/8		175	143	29	18	48	19	68.7	65.1	25.4	M16	212-38		4.4
212-39	2-7/16												212-39		
UCF 213		65											UC 213		
213-40	2-1/2		7-3/8	5-55/64	1-3/16	7/8	1-31/32	3/4	2-3/4	2.563	1.000	5/8	213-40	F213	12.10
			187	149	30	22	50	19	69.7	65.1	25.4	M16			5.5
UCF 214		70											UC 214		
214-43	2-11/16		7-19/32	5-31/32	1-1/4	7/8	2-1/8	3/4	2-31/32	2.937	1.189	5/8	214-43	F214	13.42
214-44	2-3/4		193	152	31	22	54	19	75.4	74.6	30.2	M16	214-44		6.1
UCF 215		75											UC 215		
215-47	2-15/16		7-7/8	6-1/4	1-11/32	7/8	2-7/32	3/4	3-3/32	3.063	1.311	5/8	215-47	F215	15.18
215-48	3		200	159	34	22	56	19	78.5	77.8	33.3	M16	215-48		6.9



BEARING
UNITS

BEARING UNITS





FOUR BOLT FLANGE UNITS

SBF 200 Series

Light Duty

Set Screw Locking

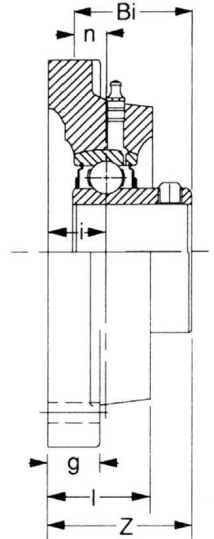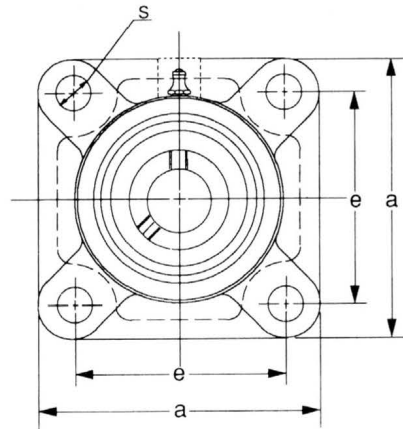

Unit No.	Shaft Dia.		Dimensions inch / mm								Bolt Size	Bearing No.	Housing No.	Weight Lbs kg
	In.	mm	a	e	i	g	l	s	z	Bi	n			
SBF 201-8	1/2		2-63/64	2-1/8	3/8	7/16	45/64	13/32	31/32	0.866	0.236	SB 201-8		
202-10	5/8		76	53.9	9.5	11	17.9	10	25	22	6	202-10	F203	0.97 0.44
SBF 204		20	3-25/64	2-1/2	19/32	7/16	1	15/32	1-19/64	0.984	0.276	SB 204		
204-12	3/4		86	63.5	15	11	25.4	12	32.9	25	7	204-12	F204	1.34 0.61
SBF 205		25	3-3/4	2-3/4	5/8	1/2	1-1/16	15/32	1-13/32	1.063	0.295	SB 205		
205-14	7/8		95	70	16	13	27	12	35.3	27	7.5	205-14	F205	1.87 0.85
205-15	15/16											205-15		
205-16	1											205-16		
SBF 206		30	4-1/4	3-9/32	23/32	1/2	1-1/4	15/32	1-9/16	1.181	0.315	SB 206		
206-17	1-1/16		108	83	18	13	31	12	40	30	8	206-17	F206	2.64 1.20
206-18	1-1/8											206-18		
206-19	1-3/16											206-19		
206-20	1-1/4											206-20		
SBF 207		35	4-19/32	3-5/8	3/4	19/32	1-11/32	9/16	1-43/64	1.260	0.335	SB 207		
207-20	1-1/4		117	92	19	15	34	14	42.5	32	8.5	207-20	F207	3.74 1.70
207-21	1-5/16											207-21		
207-22	1-3/8											207-22		
207-23	1-7/16											207-23		
SBF 208		40	5-1/8	4-1/64	13/16	19/32	1-13/32	5/8	1-3/4	1.339	0.354	SB 208		
208-24	1-1/2		130	102	21	15	36	16	44.1	34	9	208-24	F208	4.84 2.20
208-25	1-9/16											208-25		



BEARING UNITS





FOUR BOLT FLANGE UNITS

HCFS 200 Series

Normal Duty

Eccentric Collar Locking

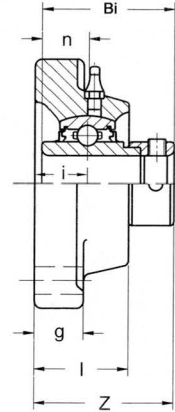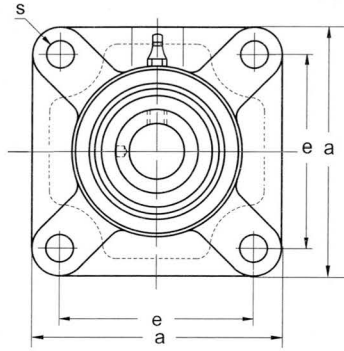

Unit No.	Shaft Dia.		Dimensions inch / mm								Bolt Size	Bearing No.	Housing No.	Weight Lbs kg
	In.	mm	a	e	i	g	l	s	z	Bi	n			
HCFS 201-8	1/2											HC 201-8		
202-10	5/8		3-25/64	2-1/2	3/4	19/32	1-11/64	15/32	1-51/64	1.713	0.669	202-10		1.76
204		20	86	63.5	19	15	29.5	12	45.5	43.5	17	204	FS204	0.8
204-12	3/4											204-12		
HCFS 205		25										HC 205		
205-14	7/8		3-43/64	2-3/4	3/4	19/32	1-3/16	15/32	1-13/16	1.744	0.685	205-14		1.98
205-15	15/16		93	70	19	15	30	12	45.8	44.3	17.4	205-15	FS205	0.9
205-16	1											205-16		
HCFS 206		30										HC 206		
206-17	1-1/16		4-11/64	3-1/4	25/32	5/8	1-9/32	15/32	1-31/32	1.902	0.717	206-17		2.86
206-18	1-1/8		106	82.5	20	16	32.5	12	50	48.3	18.2	206-18	FS206	1.3
206-19	1-3/16											206-19		
206-20	1-1/4S											206-20		
HCFS 207		35										HC 207		
207-20	1-1/4		4-9/16	3-5/8	13/16	21/32	1-3/8	9/16	2-7/64	2.012	0.740	207-20		3.96
207-21	1-5/16		116	92	21	17	35	14	53.3	51.1	18.8	207-21	FS207	1.8
207-22	1-3/8											207-22		
207-23	1-7/16											207-23		
HCFS 208		40										HC 208		
208-24	1-1/2		5-5/64	4	15/16	21/32	1-17/32	5/8	2-21/64	2.217	0.843	208-24		4.62
208-25	1-9/16		129	101.5	24	17	39	16	58.9	56.3	21.4	208-25	FS208	2.1
HCFS 209		45										HC 209		
209-26	1-5/8		5-5/16	4-1/8	15/16	23/32	1-9/16	5/8	2-21/64	2.217	0.843	209-26		5.50
209-27	1-11/16		135	105	24	18	40	16	58.9	56.3	21.4	209-27	FS209	2.5
209-28	1-3/4											209-28		
HCFS 210		50										HC 210		
210-30	1-7/8		5-5/8	4-3/8	1-3/32	25/32	1-25/32	5/8	2-19/32	2.469	0.969	210-30		6.38
210-31	1-15/16		143	111	28	20	45	16	66.1	62.7	24.6	210-31	FS210	2.9
210-32	2S											210-32		
HCFS 211		55										HC 211		
211-32	2		6-3/8	5-1/8	1-1/4	13/16	1-59/64	3/4	2-15/16	2.811	1.091	211-32		9.24
211-34	2-1/8		162	130	31	21	49	19	74.6	71.4	27.7	211-34	FS211	4.2
211-35	2-3/16											211-35		
HCFS 212		60										HC 212		
212-36	2-1/4		6-7/8	5-5/8	1-11/32	7/8	2-7/64	3/4	3-11/64	3.059	1.217	212-36		11.44
212-38	2-3/8		175	143	34	22	53.5	19	80.7	77.7	30.9	212-38	FS212	5.2
212-39	2-7/16											212-39		
HCFS 213		65										HC 213		
213-40	2-1/2		7-1/4	5-55/64	1-1/2	7/8	2-9/32	3/4	3-35/64	3.374	1.343	213-40		13.42
			184	149	38	22	58	19	89.6	85.7	34.1		FS213	6.1
HCFS 214		70										HC 214		
214-44	2-3/4		7-13/32	5-31/32	1-1/2	29/32	2-3/8	3/4	3-35/64	3.374	1.343	214-44		13.20
			188	152	38	23	60	19	89.6	85.7	34.1		FS214	6
HCFS 215		75										HC 215		
215-47	2-15/16		7-7/8	6-1/4	1-5/8	15/16	2-7/16	3/4	3-25/32	3.626	1.469	215-47		16.50
215-48	3		200	159	41	24	62	19	95.8	92.1	37.3	215-48	FS215	7.5



BEARING
UNITS

BEARING UNITS





FOUR BOLT FLANGE UNITS

SAF 200 Series

Light Duty

Eccentric Collar Locking

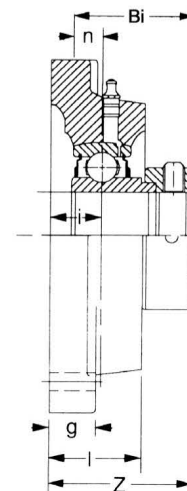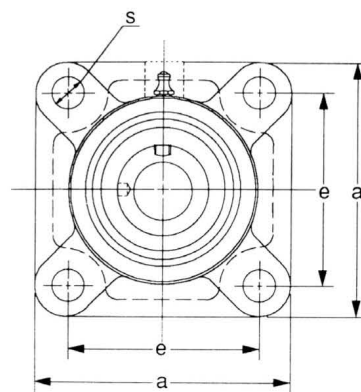

BEARING
UNITS

Unit No.	Shaft Dia.		Dimensions inch / mm									Bolt Size	Bearing No.	Housing No.	Weight Lbs kg
	In.	mm	a	e	i	g	l	s	z	Bi	n				
SAF 201-8 202-10	1/2 5/8		2-63/64 76	2-1/8 54	3/8 9.5	7/16 11	23/32 18	13/32 10	1-17/64 32.1	1.125 28.6	0.236 6	3/8 M10	SA 201-8 202-10	F203	1.14 0.52
SAF 204 204-12	3/4	20	3-25/64 86	2-1/2 63.5	19/32 15	7/16 11	1 25.4	15/32 12	1-33/64 38.5	1.220 31	0.276 7	3/8 M10	SA 204 204-12	F204	1.43 0.65
SAF 205 205-14 205-15 205-16	7/8 15/16 1	25	3-3/4 95	2-3/4 70	5/8 16	1/2 13	1-1/16 27	15/32 12	1-35/64 39.3	1.220 31	0.295 7.5	3/8 M10	SA 205 205-14 205-15 205-16	F205	1.98 0.90
SAF 206 206-17 206-18 206-19 206-20	1-1/16 1-1/8 1-3/16 1-1/4S	30	4-1/4 108	3-9/32 83	23/32 18	1/2 13	1-1/4 31	15/32 12	1-49/64 44.8	1.406 35.7	0.315 8	3/8 M10	SA 206 206-17 206-18 206-19 206-20	F206	2.75 1.25
SAF 207 207-20 207-21 207-22 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	4-19/32 117	3-5/8 92	3/4 19	19/32 15	1-11/32 34	9/16 14	1-29/32 48.4	1.531 38.9	0.335 8.5	7/16 M12	SA 207 207-20 207-21 207-22 207-23	F207	3.74 1.70
SAF 208 208-24 208-25	1-1/2 1-9/16	40	5-1/8 130	4-1/64 102	13/16 21	19/32 15	1-13/32 36	5/8 16	2-7/64 53.6	1.720 43.7	0.354 9	1/2 M14	SA 208 208-24 208-25	F208	4.84 2.20
SAF 209 209-26 209-27 209-28	1-5/8 1-11/16 1-3/4	45	5-13/32 137.3	4-1/8 105	7/8 22	5/8 16	1-1/2 38	5/8 16	2-5/32 54.8	1.720 43.7	0.374 9.5	1/2 M14	SA 209 209-26 209-27 209-28	F209	5.50 2.50
SAF 210 210-30 210-31 210-32	1-7/8 1-15/16 2S	50	5-5/8 142.9	4-3/8 111	7/8 22	5/8 16	1-9/16 40	5/8 16	2-5/32 54.8	1.720 43.7	0.394 10	1/2 M14	SA 210 210-30 210-31 210-32	F210	6.16 2.80

BEARING UNITS





FLANGE CARTRIDGE UNITS

UCFC 200 Series

Normal Duty

Set Screw Locking

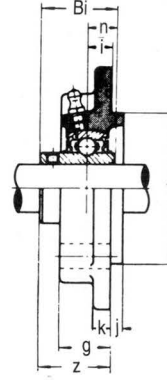

Unit No.	Shaft Dia.		Dimensions inch / mm												Bolt Size	Bearing No.	Housing No.	Weight Lbs kg
	In.	mm	a	p	e	i	s	j	k	g	f	z	Bi	n				
UCFC 201-8 202-10 204	1/2 5/8	20	3-15/16 100	3-5/64 78	2-11/64 55.1	13/32 10	15/32 12	0.197 5	9/32 7	13/16 20.5	2-7/16 62	1-1/8 28.3	1.220 31	0.500 12.7	M10 3/8	UC 201-8 202-10 204	FC204	1.76 0.8
204-12	3/4															204-12		
UCFC 205		25														UC 205		
205-14 205-15 205-16	7/8 15/16 1		4-17/32 115	3-35/64 90	2-1/2 63.6	13/32 10	15/32 12	0.236 6	9/32 7	13/16 21	2-3/4 70	1-11/64 29.7	1.339 34	0.563 14.3	M10 3/8	205-14 205-15 205-16	FC205	2.20 1
UCFC 206		30														UC 206		
206-17 206-18 206-19 206-20	1-1/16 1-1/8 1-3/16 1-1/4S		4-29/32 125	3-15/16 100	2-25/32 70.7	13/32 10	15/32 12	5/16 8	5/16 8	29/32 23	3-5/32 80	1-17/64 32.2	1.500 38.1	0.626 15.9	M10 3/8	206-17 206-18 206-19 206-20	FC206	2.86 1.3
UCFC 207		35														UC 207		
207-20 207-21 207-22 207-23	1-1/4 1-5/16 1-3/8 1-7/16		5-5/16 135	4-11/32 110	3-1/16 77.8	7/16 11	9/16 14	5/16 8	11/32 9	1-1/32 26	3-35/64 90	1-7/16 36.4	1.689 42.9	0.689 17.5	M12 7/16	207-20 207-21 207-22 207-23	FC207	3.52 1.6
UCFC 208		40														UC 208		
208-24 208-25	1-1/2 1-9/16		5-23/32 145	4-23/32 120	3-21/64 84.4	7/16 11	9/16 14	13/32 10	11/32 9	1-1/32 26	3-15/16 100	27/32 21.2	1.937 49.2	0.748 19	M12 7/16	208-24 208-25	FC208	4.62 2.1
UCFC 209		45														UC 209		
209-26 209-27 209-28	1-5/8 1-11/16 1-3/4		6-5/16 160	5-13/64 132	3-43/64 93.3	13/32 10	5/8 16	15/32 12	9/16 14	1-1/32 26	4-1/8 105	1-37/64 40.2	1.937 49.2	0.748 19	M14 1/2	209-26 209-27 209-28	FC209	5.94 2.7
UCFC 210		50														UC 210		
210-30 210-31 210-32	1-7/8 1-15/16 2S		6-1/2 165	5-7/16 138	3-27/32 97.6	13/32 10	5/8 16	15/32 12	9/16 14	1-3/32 28	4-11/32 110	1-11/16 42.6	2.031 51.6	0.748 19	M14 1/2	210-30 210-31 210-32	FC210	6.82 3.1
UCFC 211		55														UC 211		
211-32 211-34 211-35	2 2-1/8 2-3/16		7-9/32 185	5-29/64 150	4-3/16 106.1	1/2 13	3/4 19	15/32 12	19/32 15	1-1/4 31	4-29/32 125	1-53/64 46.4	2.187 55.6	0.874 22.2	M16 5/8	211-32 211-34 211-35	FC211	9.24 4.2
UCFC 212		60														UC 212		
212-36 212-38 212-39	2-1/4 2-3/8 2-7/16		7-11/16 195	6-5/16 160	4-1/2 113.1	21/32 17	3/4 19	15/32 12	19/32 15	1-13/32 36	5-5/16 135	2-15/64 56.7	2.563 65.1	1 25.4	M16 5/8	212-36 212-38 212-39	FC212	11.66 5.3





BEARING UNITS



FLANGE CARTRIDGE UNITS UCFCS 200 Series

Normal Duty
Set Screw Locking

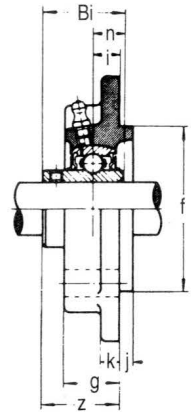

Unit No.	Shaft Dia.		Dimensions inch / mm												Bolt Size	Bearing No.	Housing No.	Weight Lbs kg
	In.	mm	a	p	e	i	s	j	k	g	f	z	Bi	n				
UCFCS 206		30																
206-17	1-1/16		4-3/8	3-5/8	2-9/16	13/32	13/32	1/4	3/8	15/16	3	1-17/64	1.500	0.626	5/16	UC 206		
206-18	1-1/8		111.1	92.1	65	10	10	6.35	9.5	23.8	76.20	32.2	38.1	15.9	M8	206-17	FCS206	2.42
206-19	1-3/16															206-18		1.1
206-20	1-1/4S															206-19		
																206-20		
UCFCS 207		35																
207-20	1-1/4		5	4-1/8	2-59/64	5/16	15/32	3/8	3/8	7/8	3-3/8	1-5/16	1.689	0.689	3/8	UC 207		
207-21	1-5/16		127	104.8	74.2	8	12	9.5	9.5	22.2	85.73	33.4	42.9	17.5	M10	207-20	FCS207	3.08
207-22	1-3/8															207-21		1.4
207-23	1-7/16															207-22		
																207-23		
UCFCS 208		40																
208-24	1-1/2		5-1/4	4-3/8	3-3/32	11/32	15/32	7/16	7/16	1-1/32	3-5/8	1-35/64	1.937	0.748	3/8	UC 208		
208-25	1-9/16		133.4	111.1	78.5	9	12	11.1	11.1	26.2	92.08	39.2	49.2	19	M10	208-24	FCS208	3.74
UCFCS 209		45																
209-26	1-5/8		6-1/8	5-1/8	3-5/8	0.220	9/16	15/32	29/64	7/8	4-1/4	1-13/32	1.937	0.748	7/16	UC 209		
209-27	1-11/16		155.6	130.2	91.9	5.6	14	11.9	11.5	22.2	107.95	35.8	49.2	19	M12	209-26	FCS209	3.96
209-28	1-3/4															209-27		1.8
																209-28		
UCFCS 210		50																
210-30	1-7/8		6-1/8	5-1/8	3-5/8	5/16	9/16	15/32	7/16	1	4-1/4	1-19/32	2.031	0.748	7/16	UC 210		
210-31	1-15/16		155.6	130.2	91.9	8	14	11.9	11.1	25.4	107.95	40.6	51.6	19	M12	210-30	FCS210	5.28
210-32	2S															210-31		2.4
																210-32		
UCFCS 211		55																
211-32	2		6-3/8	5-3/8	3-25/32	9/32	9/16	5/8	7/16	1	4-1/2	1-19/32	2.187	0.874	7/16	UC 211		
211-34	2-1/8		161.9	136.5	96.2	7	14	15.9	11.1	25.4	114.3	40.4	55.6	22.2	M12	211-32	FCS211	5.94
211-35	2-3/16															211-34		2.7
																211-35		
UCFCS 212		60																
212-36	2-1/4		7-1/8	6	4-15/64	0.157	5/8	7/8	1/2	1-1/32	5-1/2	1-23/32	2.563	1.000	7/16	UC 212		
212-38	2-3/8		181	152.4	107.5	4	16	22.2	12.7	26.2	139.7	43.7	65.1	25.4	M12	212-36	FCS212	8.14
212-39	2-7/16															212-38		3.7
																212-39		

BEARING UNITS





FLANGE CARTRIDGE UNITS

HCFC 200 Series

Normal Duty

Eccentric Collar Locking

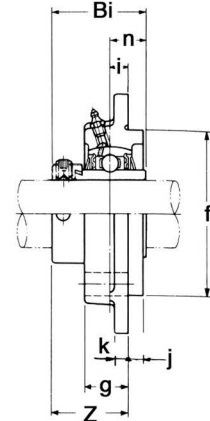



BEARING
UNITS

Unit No.	Shaft Dia.		Dimensions												Bolt Size	Bearing No.	Housing No.	Weight Lbs kg
	In.	mm	a	p	e	i	s	j	k	g	f	z	Bi	n				
HCFC 201-8 202-10 204	1/2 5/8 3/4	20	3-15/16 100	3-5/64 78	2-1/64 55.1	13/32 10	15/32 12	0.197 5	9/32 7	13/16 20.5	2-7/16 62	1-1/8 28.3	1.713 43.5	0.669 17	3/8 M10	HC 201-8 202-10 204	FC204	1.76 0.8
HCFC 205 205-14 205-15 205-16	7/8 15/16 1	25	4-17/32 115	3-35/64 90	2-1/2 63.6	13/32 10	15/32 12	0.236 6	9/32 7	13/16 21	2-3/4 70	1-11/64 29.7	1.744 44.3	0.685 17.4	3/8 M10	HC 205 205-14 205-15 205-16	FC205	2.2 1
HCFC 206 206-17 206-18 206-19 206-20	1-1/16 1-1/8 1-3/16 1-1/4S	30	4-29/32 125	3-15/16 100	2-25/32 70.7	13/32 10	15/32 12	5/16 8	5/16 8	29/32 23	3-5/32 80	1-17/64 32.2	1.902 48.3	0.717 18.2	3/8 M10	HC 206 206-17 206-18 206-19 206-20	FC206	2.86 1.3
HCFC 207 207-20 207-21 207-22 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	5-5/16 135	4-11/32 110	3-1/16 77.8	7/16 11	9/16 14	5/16 8	11/32 9	1-1/32 26	3-35/64 90	1-7/16 36.4	2.012 51.1	0.740 18.8	7/16 M12	HC 207 207-20 207-21 207-22 207-23	FC207	3.52 1.6
HCFC 208 208-24 208-25	1-1/2 1-9/16	40	2-23/32 145	4-23/32 120	3-21/64 84.4	7/16 11	9/16 14	13/32 10	11/32 9	1-1/32 26	3-15/16 100	27/32 21.2	2.217 56.3	0.843 21.4	7/16 M12	HC 208 208-24 208-25	FC208	4.62 2.1
HCFC 209 209-26 209-27 209-28	1-5/8 1-11/16 1-3/4	45	6-5/16 160	5-13/64 132	3-43/64 93.3	13/32 10	5/8 16	15/32 12	9/16 14	1-1/32 26	4-1/8 105	1-37/64 40.2	2.217 56.3	0.843 21.4	1/2 M14	HC 209 209-26 209-27 209-28	FC209	5.94 2.7
HCFC 210 210-30 210-31 210-32	1-7/8 1-15/16 2S	50	6-1/2 165	5-7/16 138	3-27/32 97.6	13/32 10	5/8 16	15/32 12	9/16 14	1-3/32 28	4-11/32 110	1-11/16 42.6	2.469 62.7	0.969 24.6	1/2 M14	HC 210 210-30 210-31 210-32	FC210	6.82 3.1
HCFC 211 211-32 211-34 211-35	2 2-1/8 2-3/16	55	7-9/32 185	5-29/64 150	4-3/16 106.1	1/2 13	3/4 19	15/32 12	19/32 15	1-1/4 31	4-29/32 125	1-53/64 46.4	2.811 71.4	1.091 27.7	5/8 M16	HC 211 211-32 211-34 211-35	FC211	9.24 4.2
HCFC 212 212-36 212-38 212-39	2-1/4 2-3/8 2-7/16	60	7-11/16 195	6-5/16 160	4-1/2 113.1	21/32 17	3/4 19	15/32 12	19/32 15	1-13/32 36	5-5/16 135	2-15/64 56.7	3.059 77.7	1.217 30.9	5/8 M16	HC 212 212-36 212-38 212-39	FC212	11.66 5.3

BEARING UNITS



HANGER UNITS UCHA 200 Series Normal Duty Set Screw Locking

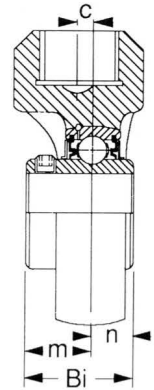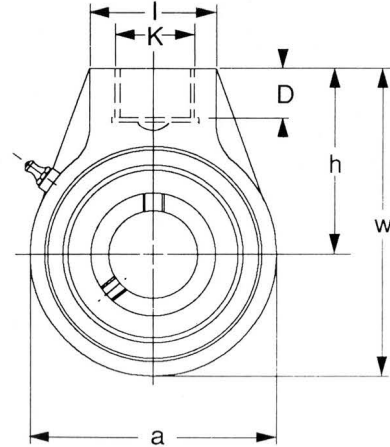

Unit No.	Shaft Dia.		Dimensions inch / mm										Bearing No.	Housing No.	Weight Lbs kg
	In.	mm	a	w	c	h	l	D	K1	Bi	n	m			
UCHA 201-8	1/2	20	2-33/64 64.3	3-25/32 96	0	2-33/64 63.9	1-9/16 39.7	3/4 19.1	NPSM-3/4	1.220 31.0	0.500 12.7	23/32 18.3	UC 201-8	HA204	1.54 0.7
202-10	5/8												202-10		
204													204		
204-12	3/4												204-12		
UCHA 205		25	3-1/16 77.8	4-5/64 103.2	0	2-33/64 63.9	1-9/16 39.7	3/4 19.1	NPSM-3/4	1.339 34.0	0.563 14.3	25/32 19.7	UC 205	HA205	2.20 1.0
205-14	7/8												205-14		
205-15	15/16												205-15		
205-16	1												205-16		
UCHA 206		30	3-1/16 77.8	4-5/64 103.2	0	2-33/64 63.9	1-9/16 39.7	3/4 19.1	NPSM-3/4	1.500 38.1	0.626 15.9	7/8 22.2	UC 206	HA206	2.20 1.0
206-17	1-1/16												206-17		
206-18	1-1/8												206-18		
206-19	1-3/16												206-19		
206-20	1-1/4S												206-20		
UCHA 207		35	3-5/8 92.1	4-9/16 115.9	0	2-3/4 69.9	1-9/16 39.7	3/4 19.1	NPSM-3/4	1.689 42.9	0.689 17.5	1 25.4	UC 207	HA207	3.08 1.4
207-20	1-1/4												207-20		
207-21	1-5/16												207-21		
207-22	1-3/8												207-22		
207-23	1-7/16												207-23		
UCHA 208		40	3-25/32 96.0	4-3/4 120.7	0.079 2.0	2-7/8 73.0	1-9/16 39.7	3/4 19.1	NPSM-3/4	1.937 49.2	0.748 19.0	1-3/16 30.2	UC 208	HA208	3.30 1.5
208-24	1-1/2												208-24		
208-25	1-9/16												208-25		
UCHA 209													UC 209		
209-26	1-5/8	45	4-1/4 108.0	5-11/32 135.7	0.205 5.2	3-1/4 82.2	1-7/8 47.6	13/16 20.6	NPSM-1	1.937 49.2	0.748 19.0	1-3/16 30.2	209-26	HA209	4.62 2.1
209-27	1-11/16												209-27		
209-28	1-3/4												209-28		
UCHA 210													UC 210		
210-30	1-7/8	50	4-21/32 118.3	5-11/32 142.1	0.205 5.2	3-9/32 82.9	1-7/8 47.6	13/16 20.6	NPSM-1	2.031 51.6	0.748 19.0	1-9/32 32.6	210-30	HA210	5.72 2.6
210-31	1-15/16												210-31		
210-32	2												210-32		

1- National Straight Pipe Thread